

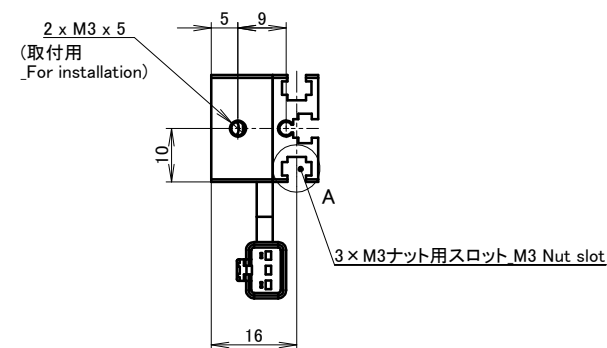


Technical drawing of the SMR-03V-B LED module. The drawing shows a side view of the module with dimensions: total length B, mounting hole spacing C, mounting hole diameter 6, and mounting hole offset 20. The module has a 16-pin emitting surface. A cable with a 300 ±35 0 length is attached to the bottom. The cable has three wires: ①: 茶 Brown(+), ②: NC, and ③: 青 Blue(-). The cable is labeled SMR-03V-B.

SMR-03V-B
①:茶_Brown(+)
②:NC
③:青_Blue(-)

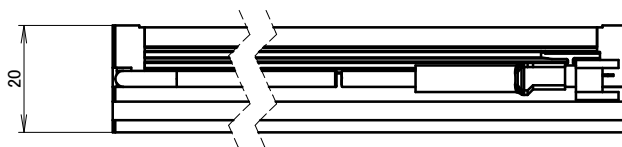

型式_Model	消費電力 Power consumption	B部寸法 Dimension B	C部寸法 Dimension C
LDL2-41X16GR2-WD	3.0W	53	41
LDL2-80X16GR2-WD	6.0W	92	80
LDL2-119X16GR2-WD	9.0W	131	119
LDL2-158X16GR2-WD	12W	170	158
LDL2-197X16GR2-WD	15W	209	197
LDL2-236X16GR2-WD	18W	248	236
LDL2-275X16GR2-WD	21W	287	275
LDL2-314X16GR2-WD	24W	326	314
LDL2-353X16GR2-WD	27W	365	353
LDL2-392X16GR2-WD	30W	404	392
LDL2-431X16GR2-WD	33W	443	431
LDL2-470X16GR2-WD	36W	482	470
LDL2-509X16GR2-WD	39W	521	509

消費電力_Power Consumption：(表参照_Table reference)

000			
REVISION	DATE	DESCRIPTION	REVISED

ISSUE DATE		SCALE	APPROVED	NAME		
2024/09/24		1:1	D.OSHIMA	LDL2-GR2-WD(幅16シリーズ_width 16 series)		
 CCS Inc.	SHEET SIZE	CHECKED	DRAWING NAME			
	A3	Y.NAKAJIMA	外観図_outline			
		DESIGNED				
	PROJECTION	K.NAGATA	DRAWING No.		REVISION	SH
		DRAWN	K.NAGATA	UA45398-G		000