
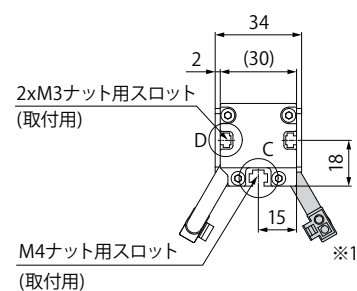
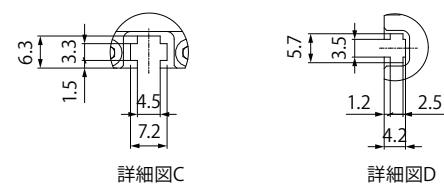


外形寸法図 (mm)

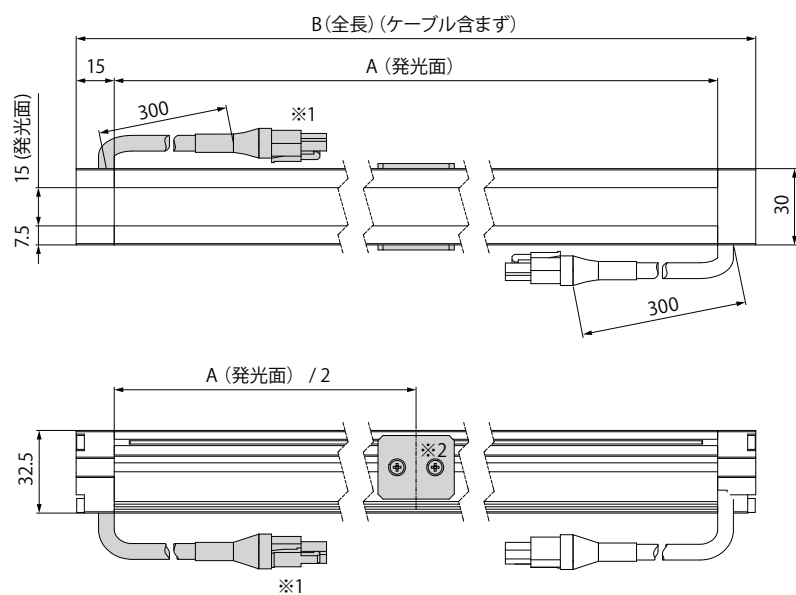

※1 発光面が1,200 mmを超える製品は、入力コネクタが二つあります。
※2 発光面が1,600 mmを超える製品のみ、補強金具があります。

型式名		A (発光面)	B (全長)	型式名		B (全長)
高輝度タイプ／高均一タイプ(型式末尾・士C)	LNSD-100SW／RD／BL	100	130	高輝度タイプ／高均一タイプ(型式末尾・士C)	LNSD-1600SW／RD／BL	1,630
	LNSD-200SW／RD／BL	200	230		LNSD-1700SW／RD／BL	1,730
	LNSD-300SW／RD／BL	300	330		LNSD-1800SW／RD／BL	1,830
	LNSD-400SW／RD／BL	400	430		LNSD-1900SW／RD／BL	1,930
	LNSD-500SW／RD／BL	500	530		LNSD-2000SW／RD／BL	2,030
	LNSD-600SW／RD／BL	600	630		LNSD-2100SW／RD／BL	2,130
	LNSD-700SW／RD／BL	700	730		LNSD-2200SW／RD／BL	2,230
	LNSD-800SW／RD／BL	800	830		LNSD-2300SW／RD／BL	2,330
	LNSD-900SW／RD／BL	900	930		LNSD-2400SW／RD／BL	2,430
	LNSD-1000SW／RD／BL	1,000	1,030		LNSD-2500SW／RD／BL	2,530
	LNSD-1100SW／RD／BL	1,100	1,130		LNSD-2600SW／RD／BL	2,630
	LNSD-1200SW／RD／BL	1,200	1,230		LNSD-2700SW／RD／BL	2,730
	LNSD-1300SW／RD／BL	1,300	1,330		LNSD-2800SW／RD／BL	2,830
	LNSD-1400SW／RD／BL	1,400	1,430		LNSD-2900SW／RD／BL	2,930
	LNSD-1500SW／RD／BL	1,500	1,530		LNSD-3000SW／RD／BL	3,030